



防水防尘-风扇 92x92x20mm

马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD


3. 调速方式 (Speed control mode)

PWM




风扇单重: 158g (weight: 158g)

风扇P-Q曲线 / Fan performance curve

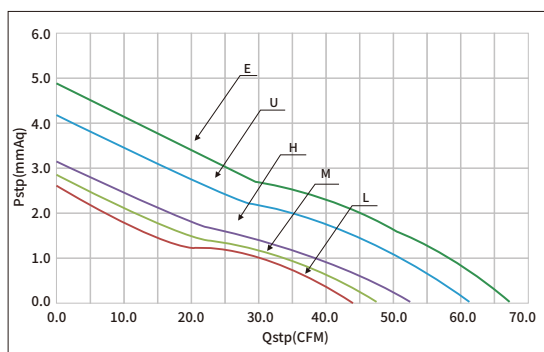

尺寸图 / DIMENSIONS DRAWING

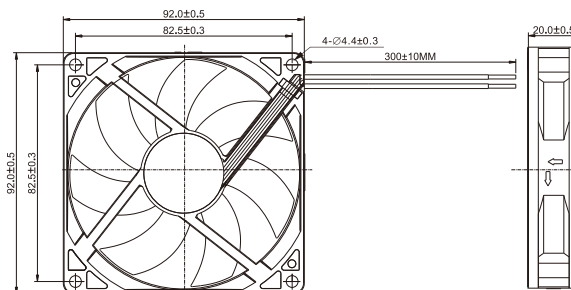

Model		Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow		Static Pressure		Noise
型号		轴承	工作电压	启动电压	电流	功率	转速	风量		风压		噪音
Part NO.	Function	System	VDC	VDC	A	W	RPM	M ³ /min	CFM	mmH ₂ O	INH ₂ O	dBA
HDB0912EC	IP 68	Ball	12	5.0	0.35	4.20	3300	1.91	67.56	4.88	0.19	42.6
HDB0912UC	IP 68			5.0	0.28	3.36	3000	1.74	61.38	4.17	0.16	40.3
HDB0912HC	IP 68			5.0	0.20	2.40	2700	1.50	52.99	3.16	0.12	36.6
HDB0912MC	IP 68			5.0	0.15	1.80	2400	1.35	47.66	2.83	0.11	33.5
HDB0912LC	IP 68			5.0	0.10	1.20	2100	1.25	44.07	2.61	0.10	31.4
HDB0924EC	IP 68	Ball	24	12.0	0.18	4.32	3300	1.91	67.56	4.88	0.19	42.6
HDB0924UC	IP 68			12.0	0.15	3.60	3000	1.74	61.38	4.17	0.16	40.3
HDB0924HC	IP 68			12.0	0.12	2.88	2700	1.50	52.99	3.16	0.12	36.6
HDB0924MC	IP 68			12.0	0.08	1.92	2400	1.35	47.66	2.83	0.11	33.5
HDB0924LC	IP 68			12.0	0.06	1.44	2100	1.25	44.07	2.61	0.10	31.4