



防水防尘-风扇 92x92x38mm-2

马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD

3. 调速方式 (Speed control mode)


PWM

TC




风扇单重:295g (weight:295g)

风扇P-Q曲线 / Fan performance curve

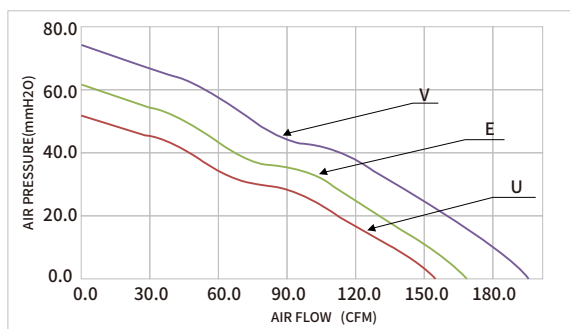

尺寸图 / DIMENSIONS DRAWING

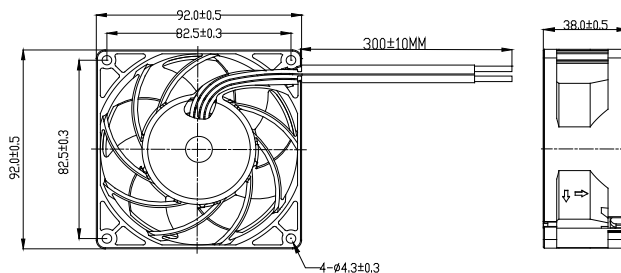

Model	Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow		Static Pressure		Noise	
型号	轴承	工作电压	启动电压	电流	功率	转速	风量	风量	风压	风压	噪音	
Part NO.	Function	System	VDC	VDC	A	W	RPM	M ³ /min	CFM	mmH ₂ O	INH ₂ O	dBA
HDB0912VF	IP68	Ball	12	6.0	4.96	59.52	13000	5.20	185.70	73.76	2.90	71.8
HDB0912EF	IP68			6.0	4.00	48.00	12000	4.76	170.00	61.85	2.44	70.0
HDB0912UF	IP68			6.0	3.20	38.40	11000	4.37	155.90	51.97	2.05	68.0
HDB0924VF	IP68	Ball	24	12.0	2.48	59.52	13000	5.20	185.70	73.76	2.90	71.8
HDB0924EF	IP68			12.0	2.00	48.00	12000	4.76	170.00	61.85	2.44	70.0
HDB0924UF	IP68			12.0	1.60	38.40	11000	4.37	155.90	51.97	2.05	68.0
HDB0948VF	IP68	Ball	48	24.0	1.24	59.52	13000	5.20	185.70	73.76	2.90	71.8
HDB0948EF	IP68			24.0	1.00	48.00	12000	4.76	170.00	61.85	2.44	70.0
HDB0948UF	IP68			24.0	0.80	38.40	11000	4.37	155.90	51.97	2.05	68.0