



## DC-鼓风机风扇 60x60x28mm

### 马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD


3. 调速方式 (Speed control mode)

PWM




风扇单重: 45g (weight: 45g)

### 风扇P-Q曲线 / Fan performance curve

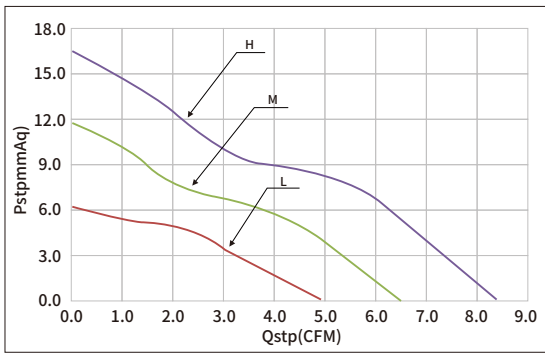

### 尺寸图 / DIMENSIONS DRAWING

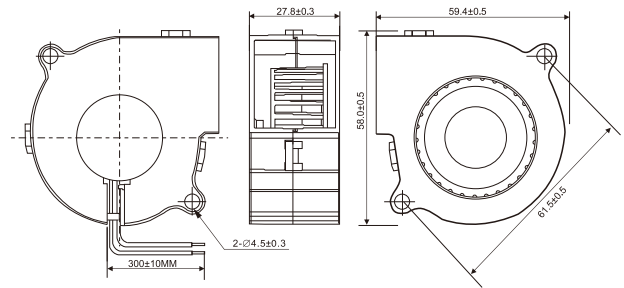

Model		Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow		Static Pressure		Noise
型号		轴承	工作电压	启动电压	电流	功率	转速	风量		风压		噪音
Part NO.	Function	System	VDC	VDC	A	W	RPM	M <sup>3</sup> /min	CFM	mmH <sub>2</sub> O	INH <sub>2</sub> O	dBA
HBS0612HB		Sleeve	12	5.0	0.20	2.40	5000	0.24	8.41	16.58	0.65	43.6
HBS0612MB				5.0	0.12	1.44	4000	0.18	6.53	11.75	0.46	38.0
HBS0612LB				5.0	0.08	0.96	3000	0.14	4.98	6.23	0.25	31.2
HBB0612HB	Ball	5.0		0.20	2.40	5000	0.24	8.41	16.58	0.65	43.6	
HBB0612MB		5.0		0.12	1.44	4000	0.18	6.53	11.75	0.46	38.0	
HBB0612LB		5.0		0.08	0.96	3000	0.14	4.98	6.23	0.25	31.2	
HBS0624HB		Sleeve	24	12.0	0.12	2.88	5000	0.24	8.41	16.58	0.65	43.6
HBS0624MB				12.0	0.08	1.92	4000	0.18	6.53	11.75	0.46	38.0
HBS0624LB				12.0	0.05	1.20	3000	0.14	4.98	6.23	0.25	31.2
HBB0624HB	Ball	12.0		0.12	2.88	5000	0.24	8.41	16.58	0.65	43.6	
HBB0624MB		12.0		0.08	1.92	4000	0.18	6.53	11.75	0.46	38.0	
HBB0624LB		12.0		0.05	1.20	3000	0.14	4.98	6.23	0.25	31.2	