



DC-直流轴流风扇 92x92x38mm-2

马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD

3. 调速方式 (Speed control mode)

PWM


TC




风扇单重: 295g (weight: 295g)



风扇P-Q曲线 / Fan performance curve

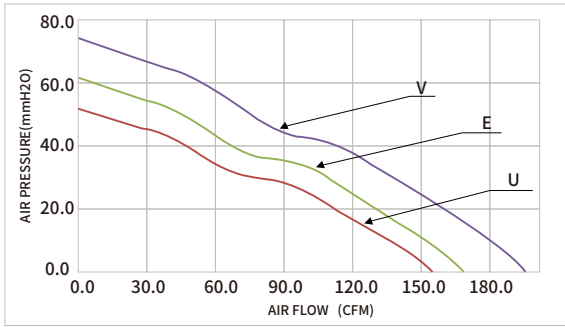

尺寸图 / DIMENSIONS DRAWING

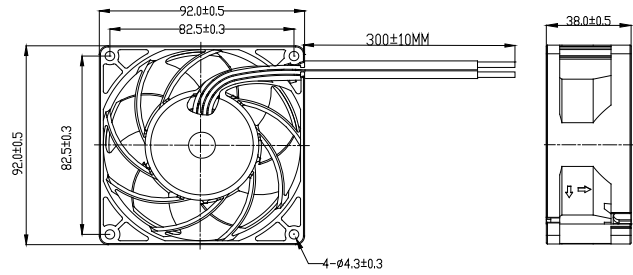

| Model | | Bearing | Rated Voltage | Startup Voltage | Current | Power | Speed | Air Flow | | Static Pressure | | Noise |
|-----------|----------|---------|---------------|-----------------|---------|-------|-------|---------------------|--------|--------------------|--------------------|-------|
| 型号 | 功能 | 轴承 | 工作电压 | 启动电压 | 电流 | 功率 | 转速 | 风量 | 风量 | 风压 | 风压 | 噪音 |
| Part NO. | Function | System | VDC | VDC | A | W | RPM | M ³ /min | CFM | mmH ₂ O | INH ₂ O | dBA |
| HDB0912VF | -A | Ball | 12 | 6.0 | 4.96 | 59.52 | 13000 | 5.20 | 185.70 | 73.76 | 2.90 | 71.8 |
| HDB0912EF | -A | | | 6.0 | 4.00 | 48.00 | 12000 | 4.76 | 170.00 | 61.85 | 2.44 | 70.0 |
| HDB0912UF | -A | | | 6.0 | 3.20 | 38.40 | 11000 | 4.37 | 155.90 | 51.97 | 2.05 | 68.0 |
| HDB0924VF | -A | Ball | 24 | 12.0 | 2.48 | 59.52 | 13000 | 5.20 | 185.70 | 73.76 | 2.90 | 71.8 |
| HDB0924EF | -A | | | 12.0 | 2.00 | 48.00 | 12000 | 4.76 | 170.00 | 61.85 | 2.44 | 70.0 |
| HDB0924UF | -A | | | 12.0 | 1.60 | 38.40 | 11000 | 4.37 | 155.90 | 51.97 | 2.05 | 68.0 |
| HDB0948VF | -A | Ball | 48 | 24.0 | 1.24 | 59.52 | 13000 | 5.20 | 185.70 | 73.76 | 2.90 | 71.8 |
| HDB0948EF | -A | | | 24.0 | 1.00 | 48.00 | 12000 | 4.76 | 170.00 | 61.85 | 2.44 | 70.0 |
| HDB0948UF | -A | | | 24.0 | 0.80 | 38.40 | 11000 | 4.37 | 155.90 | 51.97 | 2.05 | 68.0 |